

THIS PAGE INTENTIONALLY LEFT BLANK

9. FINANCIAL QUALIFICATIONS

Hughes Communications Inc. is an indirect wholly-owned subsidiary of Hughes Electronics Corporation (HE), a large aerospace, electronics manufacturing, and satellite communications company. HE, in turn, is an affiliate of General Motors Corporation (GM). As demonstrated in Appendix D, containing the consolidated financial statements of HE, HE has sufficient current assets to fund the construction, launch, and first-year operating costs of the SpaceCast™ satellite system.

THIS PAGE INTENTIONALLY LEFT BLANK

10. ENGINEERING CERTIFICATION

I hereby certify that I am the technically qualified person responsible for preparation of the engineering information contained in this application, that I am familiar with Part 25 of the Commission's Rules, that I have either prepared or reviewed the engineering information submitted in this application, and that it is complete and accurate to the best of my knowledge and belief.

By: *Daniel P. Sullivan*

Daniel P. Sullivan, Ph.D.
Vice President, Engineering
Hughes Communications, Inc.

September 24, 1997

THIS PAGE INTENTIONALLY LEFT BLANK

11. WAIVER AND CERTIFICATIONS

In accordance with Section 304 of the Communications Act of 1934, as amended, 47 U.S.C. 304, HCI hereby waives any claim to the use of any particular frequency or of the electromagnetic spectrum as against the regulatory power of the United States because of the previous use of the same, whether by license or otherwise.

HCI certifies that neither the Applicant nor any of its shareholders, nor any of its officers or directors, nor any party to this application is subject to a denial of Federal benefits pursuant to authority granted in Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. § 862.

The undersigned certifies individually and for HCI that all of the statements made in this Application are true, complete, and accurate to the best of his information, belief and knowledge, and are made in good faith.

Respectfully submitted,

Hughes Communications, Inc.

By:



Gerald F. Farrell

President

September 24, 1997

THIS PAGE INTENTIONALLY LEFT BLANK


12. CONCLUSION

For the reasons set forth in this Application, HCI respectfully requests that the Commission promptly grants this application to enable HCI to bring to the public the significant benefits described above at the earliest possible time.

Respectfully submitted,

Hughes Communications, Inc.

By:

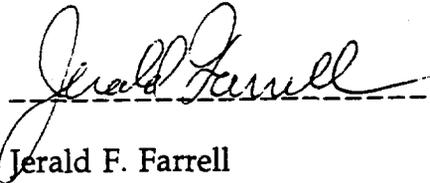

Jerald F. Farrell

President

September 24, 1997

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A: TRANSMISSION CHARACTERISTICS

SpaceCast™ link budget information is provided in Tables A-1 thru A-6. The RF communication links include the following: V-band, Ku-band, satellite telemetry, and satellite command. Uplinking sites will use 2.5 meter terminals (V-band and Ku-band). Dual band receive terminals (V-band and Ku-band) will be 1 meter (39 inches). User terminals as small as 45 cm (18 inches) can also be used for receive only service at a lower data rate. The satellite ground stations use 7-meter antennas for telemetry and command.

In all cases, the link budget calculations place the transmitting terminal of interest at the satellite antenna beam edge. All cases show a positive margin at the indicated availability values.

The V-band link budgets are given in Tables A-1-a and b and A-3-a and b. Table A-1-a contains the link for a 1 meter receive terminal, and Table A-1-b contains the link for a 45 cm receive terminal. A New York City uplink to Boston downlink was picked as being representative of the links that SpaceCast™ will provide. In both cases, a 2.5 meter uplink terminal with a 50 Watt HPA can generate an uplink EIRP of 73.0 dBW under clear conditions and 75.5 dBW under rain conditions. The satellite EIRP per carrier is 62.0 dBW. The link margin of 0.0 dB (or 0.1 dB) for clear-sky uplink and rainy downlink conditions indicates that the specified link availability objective can be met; the same is true for all link budgets presented in this Appendix. Budgets for a Tokyo uplink to Honolulu ground relay and on to Seattle are provided in Tables A-3-a and b. The link budgets show 10 carriers uplinked from a 2.5 meter ground terminal. Both Tokyo and Honolulu uplink

EIRPs per carrier are 63.0 and 65.5 dBW (50 Watt HPA) under clear and rain conditions, respectively. The satellite EIRP per carrier is 62.0 dBW.

Ku-band link budgets are given in Tables A-2, A-4-a, and A-4-b using $1^\circ \times 3^\circ$ beams. A Miami uplink to New York City downlink was picked as being representative of the links that SpaceCast™ will provide at Ku-band. A 2.5 meter terminal with a 100 Watt HPA is used to provide an uplink EIRP of 67.5 dBW under clear conditions and 68.5 dBW under rain conditions. The satellite EIRP per carrier is 54.7 dBW. A Singapore uplink to Midway ground relay and further on to Seattle downlink also was picked. Singapore uplink EIRPs per carrier are 67.5 and 68.5 dBW (100 Watt HPA) under clear and rain conditions, respectively. Midway uses a 50 Watt HPA and provides uplink EIRPs per carrier of 64.5 and 65.5 dBW under clear and rain conditions, respectively. The satellite EIRP per carrier is 54.7 dBW.

Tables A-5 and A-6 contain information regarding the satellite telemetry & command links. Dry geographical regions are selected along with favorable elevation angles for the satellite operational control facilities to provide high reliability TT&C links. The telemetry and command links will use Ku-band frequencies for transfer orbit and on-station service.

Table A-1-a. V-Band Link: New York U/L to Boston D/L - 1 m Receive Terminal

SUMMARY of Uplink Budget					SUMMARY of Downlink Budget				
Sat. Long. @ -60 deg East	Clear	Rain	Units		Clear	Rain	Units		
Terminal Location & Size:	New York	2.5	meter		Terminal Location & Size:	Boston	1.00	meter	
Site Elevation Angle	40.8		deg		Site Elevation Angle	39.8		deg	
Site Altitude (ASL)	0.0		km		Site Altitude (ASL)	0.0		km	
Frequency	48.7		GHz		Frequency	41.0		GHz	
Link Availability		99.70	%		Link Availability		98.80	%	
Application Data Rate	155		Mbps		Link Data Rate	155		Mbps	
Station Transmitter Power	50.0		W		Satellite TWTA Rating	100		W	
Transmitter Pwr (dBW)	17.0		dBW		Sat. Transmit Power	20.0		dBW	
Uplink Power Back-off	2.5		dB		Sat. HPA Backoff	2.0		dB	
# of Amplified Carriers	1				# of Amplified Carriers	10			
Station Transmitter Losses	1.0		dB		Transmitter Total losses	1		dB	
Station Antenna Diameter	2.50		m		Sat Min. Ant. Gain	55.0		dB	
Station Peak Antenna Gain	59.5		dB		Total EIRP per beam	72.0		dBW	
Total EIRP per beam		73.0	dBW		Operating EIRP/carrier		62.0	dBW	
Operating EIRP per carrier		73.0	dBW		Space Loss		216.2	dB	
Space Loss		217.7	dB		Atm. (Gas + Cloud) Attenuation		2.6	dB	
Atm. (Gas + Cloud) Att.		4.6	dB		Rain Attenuation		3.4	dB	
Rain Attenuation		14.7	dB		User Ant. Pointing Losses		0.5	dB	
Pointing and Pol. Loss		0.5	dB		Recvr. Antenna Gain		581.8	K	
Sat. Antenna Gain	55.0		dB		System Noise Temp	448.1		dBK	
System Noise Temp	649.2		K		System Noise Temp	26.5		dBK	
System Noise Temp	28.1		dBK		Station G/T		23.8	dB/K	
Satellite G/T		26.4	dB/K		Boltzmann's Constant		-228.6	dBW/K-Hz	
Boltzmann's Constant		-228.6	dBW/K-Hz		Noise BW		83.0	dBHz	
Noise BW		83.0	dBHz		C/N (Thermal)		12.0	dB	
C/N (Thermal)		22.2	dB						
Uplink Conditions					clear	rain	clear	rain	
Downlink Conditions					clear	rain	clear	rain	
Total U/L C/I	15.0		dB		U/L C/(No) (dB/Hz)	105.2	92.8	105.2	dB/Hz
U/L C/(Io)		98.0	dB/Hz		U/L C/(Io) (dB/Hz)	98.0	98.0	98.0	dB/Hz
Thermal U/L C/(No)		105.2	dB/Hz		U/L C/(No+Io) (dB/Hz)	97.2	91.7	97.2	dB/Hz
Total D/L C/I	15.0		dB		D/L C/(No) (dB/Hz)	95.0	95.0	90.3	dB/Hz
D/L C/(Io)		98.0	dB/Hz		D/L C/(Io) (dB/Hz)	98.0	98.0	98.0	dB/Hz
Thermal D/L C/(No)		95.0	dB/Hz		D/L C/(No+Io) (dB/Hz)	93.2	93.2	89.6	dB/Hz
Required Eb/No	6.5		dB		Total C/(No+Io) (dB/Hz)	91.8	89.4	88.9	dB/Hz
Effective Data Rate	174		Mbps		Required C/No (dB/Hz)	88.9	88.9	88.9	dB/Hz
Data Rate (dB)	82.4		dB (bps)		Margin (dB)	2.9	0.5	0.0	dB
Required C/(No+Io)		88.9	dB/Hz						

Table A-1-b. V-Band Link: New York U/L to Boston D/L - 0.45 m Receive Terminal

SUMMARY of Uplink Budget					SUMMARY of Downlink Budget				
Sat. Long. @ -60 deg East	Clear	Rain	Units		Clear	Rain	Units		
Terminal Location & Size:	New York	2.5	meter		Terminal Location & Size:	Boston	0.45	meter	
Site Elevation Angle	40.8		deg		Site Elevation Angle	39.8		deg	
Site Altitude (ASL)	0.0		km		Site Altitude (ASL)	0.0		km	
Frequency	48.7		GHz		Frequency	41.0		GHz	
Link Availability		99.70	%		Link Availability		98.60	%	
Application Data Rate	26		Mbps		Link Data Rate	26		Mbps	
Station Transmitter Power	50.0		W		Satellite TWTA Rating	100		W	
Transmitter Pwr (dBW)	17.0		dBW		Sat. Transmit Power	20.0		dBW	
Uplink Power Back-off	2.5		dB		Sat. HPA Backoff	2.0		dB	
# of Amplified Carriers	1				# of Amplified Carriers	10			
Station Transmitter Losses	1.0		dB		Transmitter Total losses	1		dB	
Station Antenna Diameter	2.50		m		Sat Min. Ant. Gain	55.0		dB	
Station Peak Antenna Gain	59.5		dB		Total EIRP per beam	72.0		dBW	
Total EIRP per beam		73.0	dBW		Operating EIRP/carrier		62.0	dBW	
Operating EIRP per carrier		73.0	dBW		Space Loss		216.2	dB	
Space Loss		217.7	dB		Atm. (Gas + Cloud) Attenuation		2.6	dB	
Atm. (Gas + Cloud) Att.		4.6	dB		Rain Attenuation		2.9	dB	
Rain Attenuation		14.7	dB		User Ant. Pointing Losses		0.5	dB	
Pointing and Pol. Loss		0.5	dB		Recvr. Antenna Gain		568.9	K	
Sat. Antenna Gain	55.0		dB		System Noise Temp	448.1		dBK	
System Noise Temp	649.2		K		System Noise Temp	26.5		dBK	
System Noise Temp	28.1		dBK		Station G/T		16.8	dB/K	
Satellite G/T		26.4	dB/K		Boltzmann's Constant		-228.6	dBW/K-Hz	
Boltzmann's Constant		-228.6	dBW/K-Hz		Noise BW		75.3	dBHz	
Noise BW		75.3	dBHz		C/N (Thermal)		12.8	dB	
C/N (Thermal)		29.9	dB						
Uplink Conditions					clear	rain	clear	rain	
Downlink Conditions					clear	rain	clear	rain	
Total U/L C/I	15.0		dB		U/L C/(No) (dB/Hz)	105.2	92.8	105.2	dB/Hz
U/L C/(Io)		90.3	dB/Hz		U/L C/(Io) (dB/Hz)	90.3	90.3	90.3	dB/Hz
Thermal U/L C/(No)		105.2	dB/Hz		U/L C/(No+Io) (dB/Hz)	90.1	88.4	90.1	dB/Hz
Total D/L C/I	13.4		dB		D/L C/(No) (dB/Hz)	87.0	85.2	82.9	dB/Hz
D/L C/(Io)		88.7	dB/Hz		D/L C/(Io) (dB/Hz)	88.7	88.7	88.7	dB/Hz
Thermal D/L C/(No)		88.1	dB/Hz		D/L C/(No+Io) (dB/Hz)	84.8	83.6	81.9	dB/Hz
Required Eb/No	6.5		dB		Total C/(No+Io) (dB/Hz)	83.7	82.4	81.3	dB/Hz
Effective Data Rate	30		Mbps		Required C/No (dB/Hz)	81.2	81.2	81.2	dB/Hz
Data Rate (dB)	74.7		dB (bps)		Margin (dB)	2.4	1.1	0.1	dB
Required C/(No+Io)		81.2	dB/Hz						

Table A-2. Ku-Band Link: Miami U/L to New York D/L - 1 m Receive Terminal

SUMMARY of Uplink Budget					SUMMARY of Downlink Budget				
Sat.long. @ -60 deg East	Clear		Rain	Units	Terminal Location & Size:	Clear		Rain	Units
Terminal Location & Size:	Miami	2.5		meter	New York	1.00			meter
Site Elevation Angle	52.4			deg	Site Elevation Angle	40.8			deg
Site Altitude (ASL)	0.0			km	Site Altitude (ASL)	0.0			km
Frequency	13.0			GHz	Frequency	11.0			GHz
Link Availability			99.70	%	Link Availability			99.70	%
Application Data Rate	155			Mbps	Link Data Rate	155			Mbps
Station Transmitter Power	100.0			W	Satellite TWTA Rating	150			W
Transmitter Pwr (dBW)	20.0			dBW	Sat. Transmit Power	21.8			dBW
Uplink Power Back-off	1.0		0	dB	Sat. HPA Backoff	0.0			dB
# of Amplified Carriers	1				# of Amplified Carriers	1			
Station Transmitter Losses	0.3			dB	Transmitter Total losses	0.6			dB
Station Antenna Diameter	2.50			m	Sat Min. Ant. Gain	33.5			dB
Station Peak Antenna Gain	48.8			dBi	Total EIRP per beam	54.7			dBW
Total EIRP per beam		67.5	68.5		Operating EIRP/carrier		54.7	54.7	dBW
Operating EIRP per carrier		67.5	68.5	dBW	Space Loss		204.8	204.8	dB
Space Loss		206.1	206.1	dB	Atm. (Gas + Cloud) Attenuation		0.2	0.2	dB
Atm. (Gas + Cloud) Att.		0.3	0.3	dB	Rain Attenuation			0.9	dB
Rain Attenuation			3.9	dB	User Ant. Pointing Losses		0.4	0.4	dB
Pointing and Poi. Loss		0.4	0.4	dB	Recvr. Antenna Gain	39.4			dB
Sat. Antenna Gain	33.5			dBi	System Noise Temp	91.6		137.7	K
System Noise Temp	365.1			K	System Noise Temp	19.6		21.4	dBK
System Noise Temp	25.6			dBK	Station G/T		19.4	17.7	dB/K
Satellite G/T		7.4	7.4	dB/K	Boltzmann's Constant		-228.6	-228.6	dBW/K-Hz
Boltzmann's Constant		-228.6	-228.6	dBW/K-Hz	Noise BW		83.0	83.0	dBHz
Noise BW		83.0	83.0	dBHz	C/N (Thermal)		14.3	11.6	dB
C/N (Thermal)		13.7	10.8	dB	Uplink Conditions	clear	rain	clear	
					Downlink Conditions	clear	clear	rain	
Total U/L C/I	14.1			dB	U/L C/(No) (dB/Hz)	96.7	93.8	96.7	dB/Hz
U/L C/(Io)		97.1	97.1	dB/Hz	U/L C/(Io) (dB/Hz)	97.1	97.1	97.1	dB/Hz
Thermal U/L C/(No)		96.7	93.8	dB/Hz	U/L C/(No+Io) (dB/Hz)	93.9	92.1	93.9	dB/Hz
Total D/L C/I	10.4			dB	D/L C/(No) (dB/Hz)	97.3	97.3	94.6	dB/Hz
D/L C/(Io)		93.4	93.4	dB/Hz	D/L C/(Io) (dB/Hz)	93.4	93.4	93.4	dB/Hz
Thermal D/L C/(No)		97.3	94.6	dB/Hz	D/L C/(No+Io) (dB/Hz)	91.9	91.9	90.9	dB/Hz
Required Eb/No	6.5			dB	Total C/(No+Io) (dB/Hz)	89.8	89.0	89.2	dB/Hz
Effective Data Rate	174			Mbps	Required C/No (dB/Hz)	88.9	88.9	88.9	dB/Hz
Data Rate (dB)	82.4			dB (bps)	Margin (dB)	0.9	0.1	0.2	dB
Required C/(No+Io)		88.9	88.9	dB/Hz					

Table A-3-a V-Band Link: Tokyo U/L to Honolulu D/L - 2.5 m Terminals

SUMMARY of Uplink Budget					SUMMARY of Downlink Budget				
Sat. Long. @ 155 deg East	Clear	Rain	Units		Clear	Rain	Units		
Terminal Location & Size:	Tokyo	2.5		meter	Terminal Location & Size:	Honolulu	2.50		meter
Site Elevation Angle	45.5			deg	Site Elevation Angle	31.9			deg
Site Altitude (ASL)	0.0			km	Site Altitude (ASL)	0.0			km
Frequency	48.7			GHz	Frequency	41.0			GHz
Link Availability		99.00		%	Link Availability		99.00		%
Application Data Rate	155			Mbps	Link Data Rate	155			Mbps
Station Transmitter Power	50.0			W	Satellite TWTA Rating	100			W
Transmitter Pwr (dBW)	17.0			dBW	Sat. Transmit Power	20.0			dBW
Uplink Power Back-off	2.5		0	dB	Sat. HPA Backoff	2.0			dB
# of Amplified Carriers	10				# of Amplified Carriers	10			
Station Transmitter Losses	1.0			dB	Transmitter Total losses	1			dB
Station Antenna Diameter	2.50			m	Sat Min. Ant. Gain	55.0			dB
Station Peak Antenna Gain	59.5			dB	Total EIRP per beam	72.0			dBW
Total EIRP per beam		73.0	75.5						
Operating EIRP per carrier		63.0	65.5	dBW	Operating EIRP/carrier		62.0	62.0	dBW
Space Loss		217.6	217.6	dB	Space Loss		216.4	216.4	dB
Atm. (Gas + Cloud) Att.		4.2	4.4	dB	Atm. (Gas + Cloud) Attenuation		2.7	2.8	dB
Rain Attenuation			7.3	dB	Rain Attenuation			8.6	dB
Pointing and Pol. Loss		0.5	0.5	dB	User Ant. Pointing Losses		0.5	0.5	dB
Sat. Antenna Gain		55.0		dB	Recvr. Antenna Gain		58.0		dB
System Noise Temp		649.2		K	System Noise Temp		451.2		K
System Noise Temp		28.1		dBK	System Noise Temp		26.5		dBK
Satellite G/T		26.4	26.4	dB/K	Station G/T		31.0	29.4	dB/K
Boltzmann's Constant		-228.6	-228.6	dBW/K-Hz	Boltzmann's Constant		-228.6	-228.6	dBW/K-Hz
Noise BW		83.0	83.0	dBHz	Noise BW		83.0	83.0	dBHz
C/N (Thermal)		12.6	7.7	dB	C/N (Thermal)		19.0	8.7	dB
Uplink Conditions					Downlink Conditions				
Uplink Conditions					clear	rain	clear	rain	
Total U/L C/I	15.0			dB	U/L C/(No) (dB/Hz)	95.7	90.7	95.7	dB/Hz
U/L C/(Io)		98.0	98.0	dB/Hz	U/L C/(Io) (dB/Hz)	98.0	98.0	98.0	dB/Hz
Thermal U/L C/(No)		95.7	90.7	dB/Hz	U/L C/(No+Io) (dB/Hz)	93.6	89.9	93.6	dB/Hz
Total D/L C/I	15.4			dB	D/L C/(No) (dB/Hz)	102.0	100.7	91.7	dB/Hz
D/L C/(Io)		98.4	98.4	dB/Hz	D/L C/(Io) (dB/Hz)	98.4	98.4	98.4	dB/Hz
Thermal D/L C/(No)		102.0	91.7	dB/Hz	D/L C/(No+Io) (dB/Hz)	96.8	96.4	90.8	dB/Hz
Required Eb/No		6.5		dB	Total C/(No+Io) (dB/Hz)	91.9	89.0	89.0	dB/Hz
Effective Data Rate		174		Mbps	Required C/No (dB/Hz)	88.9	88.9	88.9	dB/Hz
Data Rate (dB)		82.4		dB (bps)	Margin (dB)	3.0	0.1	0.1	dB
Required C/(No+Io)		88.9	88.9	dB/Hz					

Table A-3-b V-Band Link: Honolulu U/L to Seattle D/L - 2.5 m Terminals

SUMMARY of Uplink Budget					SUMMARY of Downlink Budget				
Sat. Long. @ -125 deg East	Clear	Rain	Units		Clear	Rain	Units		
Terminal Location & Size:	Honolulu	2.5		meter	Terminal Location & Size:	Seattle	2.50		meter
Site Elevation Angle	45.4			deg	Site Elevation Angle	35.2			deg
Site Altitude (ASL)	0.0			km	Site Altitude (ASL)	0.0			km
Frequency	48.7			GHz	Frequency	41.0			GHz
Link Availability		99.00		%	Link Availability		99.88		%
Application Data Rate	155			Mbps	Link Data Rate	155			Mbps
Station Transmitter Power	50.0			W	Satellite TWTA Rating	100			W
Transmitter Pwr (dBW)	17.0			dBW	Sat. Transmit Power	20.0			dBW
Uplink Power Back-off	2.5		0	dB	Sat. HPA Backoff	2.0			dB
# of Amplified Carriers	10				# of Amplified Carriers	10			
Station Transmitter Losses	1.0			dB	Transmitter Total losses	1			dB
Station Antenna Diameter	2.50			m	Sat Min. Ant. Gain	55.0			dB
Station Peak Antenna Gain	59.5			dB	Total EIRP per beam	72.0			dBW
Total EIRP per beam		73.0	75.5						
Operating EIRP per carrier		63.0	65.5	dBW	Operating EIRP/carrier		62.0	62.0	dBW
Space Loss		217.6	217.6	dB	Space Loss		216.3	216.3	dB
Atm. (Gas + Cloud) Att.		3.8	3.8	dB	Atm. (Gas + Cloud) Attenuation		2.5	2.6	dB
Rain Attenuation			7.5	dB	Rain Attenuation			10.0	dB
Pointing and Pol. Loss		0.5	0.5	dB	User Ant. Pointing Losses		0.5	0.5	dB
Sat. Antenna Gain		55.0		dB	Recvr. Antenna Gain		58.7		dB
System Noise Temp		649.2		K	System Noise Temp		441.9		K
System Noise Temp		28.1		dBK	System Noise Temp		26.5		dBK
Satellite G/T		26.4	26.4	dB/K	Station G/T		31.8	30.1	dB/K
Boltzmann's Constant		-228.6	-228.6	dBW/K-Hz	Boltzmann's Constant		-228.6	-228.6	dBW/K-Hz
Noise BW		83.0	83.0	dBHz	Noise BW		83.0	83.0	dBHz
C/N (Thermal)		13.1	8.0	dB	C/N (Thermal)		20.1	8.3	dB
Uplink Conditions					Downlink Conditions				
Uplink Conditions					clear	rain	clear	rain	
Total U/L C/I	15.0			dB	U/L C/(No) (dB/Hz)	96.1	91.0	96.1	dB/Hz
U/L C/(Io)		98.0	98.0	dB/Hz	U/L C/(Io) (dB/Hz)	98.0	98.0	98.0	dB/Hz
Thermal U/L C/(No)		96.1	91.0	dB/Hz	U/L C/(No+Io) (dB/Hz)	93.9	90.2	93.9	dB/Hz
Total D/L C/I	15.4			dB	D/L C/(No) (dB/Hz)	103.1	102.0	91.3	dB/Hz
D/L C/(Io)		98.4	98.4	dB/Hz	D/L C/(Io) (dB/Hz)	98.4	98.4	98.4	dB/Hz
Thermal D/L C/(No)		103.1	91.3	dB/Hz	D/L C/(No+Io) (dB/Hz)	97.1	96.8	90.6	dB/Hz
Required Eb/No		6.5		dB	Total C/(No+Io) (dB/Hz)	92.2	89.3	88.9	dB/Hz
Effective Data Rate		174		Mbps	Required C/No (dB/Hz)	88.9	88.9	88.9	dB/Hz
Data Rate (dB)		82.4		dB (bps)	Margin (dB)	3.3	0.4	0.0	dB
Required C/(No+Io)		88.9	88.9	dB/Hz					

Table A-4-a Ku-Band Link: Singapore U/L to Midway D/L - 2.5 m Terminals

SUMMARY of Uplink Budget					SUMMARY of Downlink Budget				
Sat.long. @ 155 deg East	Clear		Rain	Units	Terminal Location & Size:	Clear		Rain	Units
Terminal Location & Size:	Singapore	2.5		meter	Midway	2.50			meter
Site Elevation Angle	31.1			deg	Site Elevation Angle	45.2			deg
Site Altitude (ASL)	0.0			km	Site Altitude (ASL)	0.0			km
Frequency	13.0			GHz	Frequency	11.0			GHz
Link Availability			99.40	%	Link Availability			99.94	%
Application Data Rate	155			Mbps	Link Data Rate	155			Mbps
Station Transmitter Power	100.0			W	Satellite TWTA Rating	150			W
Transmitter Pwr (dBW)	20.0			dBW	Sat. Transmit Power	21.8			dBW
Uplink Power Back-off	1.0		0	dB	Sat. HPA Backoff	0.0			dB
# of Amplified Carriers	1				# of Amplified Carriers	1			
Station Transmitter Losses	0.3			dB	Transmitter Total losses	0.6			dB
Station Antenna Diameter	2.50			m	Sat. Min. Ant. Gain	33.5			dB
Station Peak Antenna Gain	48.8			dB	Total EIRP per beam	54.7			dBW
Total EIRP per beam		67.5	68.5	dBW	Operating EIRP/carrier		54.7	54.7	dBW
Operating EIRP per carrier		67.5	68.5	dBW	Space Loss		204.7	204.7	dB
Space Loss		206.4	206.4	dB	Atm. (Gas + Cloud) Att.		0.2	0.2	dB
Atm. (Gas + Cloud) Att.		0.5	0.5	dB	Rain Attenuation		0.2	1.9	dB
Rain Attenuation			7.2	dB	User Ant. Pointing Losses		0.4	0.4	dB
Pointing and Pol. Loss		0.4	0.4	dB	Recvr. Antenna Gain	47.3			dB
Sat. Antenna Gain	33.5			dB	System Noise Temp	89.0		174.8	K
System Noise Temp	365.1			K	System Noise Temp	19.5		22.4	dBK
System Noise Temp	25.6			dBK	Station G/T		27.5	24.6	dB/K
Satellite G/T		7.4	7.4	dB/K	Boltzmann's Constant		-228.6	-228.6	dBW/K-Hz
Boltzmann's Constant		-228.6	-228.6	dBW/K-Hz	Noise BW		83.0	83.0	dBHz
Noise BW		83.0	83.0	dBHz	C/N (Thermal)		22.5	17.6	dB
C/N (Thermal)		13.1	6.9	dB					
					Uplink Conditions	clear	rain	clear	rain
					Downlink Conditions	clear	clear	clear	rain
Total U/L C/I	16.6			dB	U/L C/(No) (dB/Hz)	96.1	89.9	96.1	dB/Hz
U/L C/(Io)		99.6	99.6	dB/Hz	U/L C/(Io) (dB/Hz)	99.6	99.6	99.6	dB/Hz
Thermal U/L C/(No)		96.1	89.9	dB/Hz	U/L C/(No+Io) (dB/Hz)	94.5	89.5	94.5	dB/Hz
Total D/L C/I	15.8			dB	D/L C/(No) (dB/Hz)	105.5	103.8	100.6	dB/Hz
D/L C/(Io)		98.8	98.8	dB/Hz	D/L C/(Io) (dB/Hz)	98.8	98.8	98.8	dB/Hz
Thermal D/L C/(No)		105.5	100.6	dB/Hz	D/L C/(No+Io) (dB/Hz)	97.9	97.6	96.6	dB/Hz
Required Eb/No	6.5			dB	Total C/(No+Io) (dB/Hz)	92.9	88.9	92.4	dB/Hz
Effective Data Rate	174			Mbps	Required C/No (dB/Hz)	88.9	88.9	88.9	dB/Hz
Data Rate (dB)	82.4			dB (bps)					
Required C/(No+Io)		88.9	88.9	dB/Hz	Margin (dB)	4.0	0.0	3.5	dB

Table A-4-b Ku-Band Link: Midway U/L to Seattle D/L - 2.5 m Terminals

SUMMARY of Uplink Budget					SUMMARY of Downlink Budget				
Sat.long. @ -125 deg East	Clear		Rain	Units	Terminal Location & Size:	Clear		Rain	Units
Terminal Location & Size:	Midway	2.5		meter	Seattle	2.50			meter
Site Elevation Angle	24.6			deg	Site Elevation Angle	35.2			deg
Site Altitude (ASL)	0.0			km	Site Altitude (ASL)	0.0			km
Frequency	13.0			GHz	Frequency	11.0			GHz
Link Availability			99.92	%	Link Availability			99.99	%
Application Data Rate	155			Mbps	Link Data Rate	155			Mbps
Station Transmitter Power	50.0			W	Satellite TWTA Rating	150			W
Transmitter Pwr (dBW)	17.0			dBW	Sat. Transmit Power	21.8			dBW
Uplink Power Back-off	1.0		0	dB	Sat. HPA Backoff	0.0			dB
# of Amplified Carriers	1				# of Amplified Carriers	1			
Station Transmitter Losses	0.3			dB	Transmitter Total losses	0.6			dB
Station Antenna Diameter	2.50			m	Sat. Min. Ant. Gain	33.5			dB
Station Peak Antenna Gain	48.8			dB	Total EIRP per beam	54.7			dBW
Total EIRP per beam		64.5	65.5	dBW	Operating EIRP/carrier		54.7	54.7	dBW
Operating EIRP per carrier		64.5	65.5	dBW	Space Loss		204.9	204.9	dB
Space Loss		206.6	206.6	dB	Atm. (Gas + Cloud) Att.		0.2	0.2	dB
Atm. (Gas + Cloud) Att.		0.4	0.4	dB	Rain Attenuation		0.2	5.0	dB
Rain Attenuation			3.9	dB	User Ant. Pointing Losses		0.4	0.4	dB
Pointing and Pol. Loss		0.4	0.4	dB	Recvr. Antenna Gain	47.3			dB
Sat. Antenna Gain	33.5			dB	System Noise Temp	91.4		257.1	K
System Noise Temp	365.1			K	System Noise Temp	19.6		24.1	dBK
System Noise Temp	25.6			dBK	Station G/T		27.4	22.9	dB/K
Satellite G/T		7.4	7.4	dB/K	Boltzmann's Constant		-228.6	-228.6	dBW/K-Hz
Boltzmann's Constant		-228.6	-228.6	dBW/K-Hz	Noise BW		83.0	83.0	dBHz
Noise BW		83.0	83.0	dBHz	C/N (Thermal)		22.1	12.7	dB
C/N (Thermal)		10.1	7.2	dB					
					Uplink Conditions	clear	rain	clear	rain
					Downlink Conditions	clear	clear	clear	rain
Total U/L C/I	16.1			dB	U/L C/(No) (dB/Hz)	93.1	90.2	93.1	dB/Hz
U/L C/(Io)		99.1	99.1	dB/Hz	U/L C/(Io) (dB/Hz)	99.1	99.1	99.1	dB/Hz
Thermal U/L C/(No)		93.1	90.2	dB/Hz	U/L C/(No+Io) (dB/Hz)	92.1	89.6	92.1	dB/Hz
Total D/L C/I	15.8			dB	D/L C/(No) (dB/Hz)	105.1	103.6	95.7	dB/Hz
D/L C/(Io)		98.8	98.8	dB/Hz	D/L C/(Io) (dB/Hz)	98.8	98.8	98.8	dB/Hz
Thermal D/L C/(No)		105.1	95.7	dB/Hz	D/L C/(No+Io) (dB/Hz)	97.9	97.5	93.9	dB/Hz
Required Eb/No	6.5			dB	Total C/(No+Io) (dB/Hz)	91.1	89.0	88.9	dB/Hz
Effective Data Rate	174			Mbps	Required C/No (dB/Hz)	88.9	88.9	88.9	dB/Hz
Data Rate (dB)	82.4			dB (bps)					
Required C/(No+Io)		88.9	88.9	dB/Hz	Margin (dB)	2.2	0.1	1.0	dB

Table A-5. Ku-Band Telemetry Link

Parameter	Spot Antenna	Omni Pipe	Comments
Minimum EIRP, dBW	8.0	0.0	Estimate
Path Loss, dB/m ²	-162.5	-162.5	40° elevation
Atmospheric Absorption, dB	-0.2	-0.2	Estimate; clear sky
Isotropic Area, dB-m ²	-42.0	-42.0	10700 MHz
Ground Station G/T, dB/°K	34.2	34.2	7-m antenna
Tracking Loss	-0.1	-0.1	
Polarization Mismatch, dB	-0.1	-0.1	
Boltzmann's Constant, dBW/°K-Hz	-228.6	-228.6	
Downlink C/No. @ TM Receiver, dB-Hz	65.8	57.8	For 4 Kbps stream 1.0 dB rain fade for 99.95% availability
Minimum C/No @ TM Receiver, dB-Hz	53.0	53.0	
Clear Weather C/No Margin, dB	12.8	4.8	
S/No Computation for Ranging:			when carrier is at minimum modulation index
Demodulation Factor, dB	-5.2	-5.2	
Receiver Baseband S/No, dB-Hz	60.6	52.6	
Carrier Recovery:			10 kHz PM demod PLL BW when carrier is at maximum modulation index
TM Receiver Loop Bandwidth, dB-Hz	40.0	40.0	
Carrier Power Factor, dB	-3.2	-3.2	
Margin, dB	16.7	8.7	
Subcarrier Recovery:			500 kHz BW when carrier is at minimum modulation index
TM Receiver IF Bandwidth, dB-Hz	57.0	57.0	
Subcarrier Power Factor, dB	-5.2	-5.2	
Margin, dB	18.6	10.6	
BER Computation:			for 10 ⁻⁶ bit error rate
Demodulation Factor, dB	-5.2	-5.2	
Implementation Loss, dB	-2.5	-2.5	
Margin, dB	11.6	3.6	

Table A-6. Ku-Band Command Links

SpaceCast Ku-band On-station Planar Array Command Link Budget		
Contribution	Value	Comment
Max Ground Station EIRP, dBW	83.8	7-m antenna
Tracking Error Ground Station, dB	-0.2	
Path Loss, dB-m ²	-162.5	40° elevation
Clear Sky Loss, dB	-0.3	
Isotropic Area, dB-m ²	-43.6	12750 MHz
BTA Gain (Sum Path), dB	34.7	USDBS
Polarization Loss, dB	-0.1	
Path Loss to CR, dB	-16.3	Ku-band; includes SSMA
Power at Cmd Rcvr input, dBW	-104.5	
Command Receiver Threshold, dBW	-135.0	
Command Margin, dB	36.4	
Rain Fade, dB	1.3	99.95% availability
Command Margin with Rain Fade, dB	34.1	
SpaceCast Ku-band On-station Pipe Command Link Budget		
Contribution	Value	Comment
Max Ground Station EIRP, dBW	83.8	7-m antenna
Tracking Error Ground Station, dB	-0.2	
Path Loss, dB-m ²	-162.5	40° elevation
Clear Sky Loss, dB	-0.3	
Isotropic Area, dB-m ²	-43.6	12750 MHz
BTA Gain (Sum Path), dB	3.7	On-axis (Ku-band)
Polarization Loss, dB	-3.0	Linear Transmit to Circular Receive
Path Loss to CR, dB	-6.3	
Power at Cmd Rcvr input, dBW	-128.4	Ku-band; includes SSMA
Command Receiver Threshold, dBW	-135.0	
Command Margin, dB	6.6	
Rain Fade, dB	1.3	99.95% availability
Command Margin with Rain Fade, dB	5.3	

Appendix B
Interference Analysis

APPENDIX B: INTERFERENCE ANALYSIS

This appendix presents C/I interference analyses and their results for scenarios involving SpaceCast™ and hypothetical GSO FSS systems.

A C/I analysis was performed to determine whether SpaceCast™ could share spectrum with a hypothetical GSO FSS system operating at V-band, referred to here as System-X. In scenario #1, the interfered-with satellite is System-X, which has the same parameters as a SpaceCast™ satellite. The C/I for scenario #1 is given in Table B-1. Parameters for interference analyses of this type are listed in Table B-3 for the uplink, and in Table B-4 for the downlink. In this type of scenario, a SpaceCast™ satellite and a System-X satellite are spaced 2° apart on the geostationary arc. This is approximately equivalent to a topographic angle of 2.2°. The interference budget for scenario #1 is shown in Table B-7. It shows that, at V-band, SpaceCast™ can operate 2° away from a similar system without harmfully interfering with it.

The interference budget for the reverse scenario, where System-X interferes with a SpaceCast™ satellite, is shown in Table B-9. Again, System-X has the parameters of a SpaceCast™ satellite. The two satellites are spaced 2° apart on the geostationary arc. The resulting C/I shows that, at V-band, SpaceCast™ can operate 2° away from a similar system without being harmfully interfered with.

Also, a C/I analysis was performed to determine whether SpaceCast™ could share spectrum with Expressway™. Expressway™ is a proposed GSO FSS system, which would operate in the same frequency bands as SpaceCast™. The parameters for this system are listed in Table B-3 for the uplink, and in Table B-4 for the

downlink. First, the C/I for a SpaceCast™ satellite interfering with an Expressway™ satellite is calculated and listed under scenario #2 in Table B-1. The interference budget for this is given in Table B-8. Then, the C/I for the worst case interference, a scenario where an Expressway™ satellite interferes with a SpaceCast™ satellite, is calculated and given as scenario #4. The interference budget for scenario #4 is shown in Table B-10. In scenarios #2 and #4 in Table B-1, the two satellites are spaced 2° apart on the geostationary arc. Again, this is approximately equivalent to a topographic angle of 2.2°. The C/I results show that, for V-band operations, Expressway™ and SpaceCast™ are compatible when spaced 2° apart.

C/I analyses were also performed to determine whether SpaceCast™ could share spectrum with a hypothetical GSO FSS system operating at Ku-band, referred to here as System-Y. System-Y has earth station and space station characteristics derived from typical Ku-band satellite systems. The System-Y transponder bandwidth is assumed to be 30 MHz for satellite television signal transmissions. In interference scenarios, a SpaceCast™ satellite and a System-Y satellite are spaced 2° apart on the geostationary arc. The worst case scenario for SpaceCast™ interfering with System-Y is listed as scenario #5 in Table B-2. The worst case scenario for the reverse scenario, where System-Y interferes with SpaceCast™, is listed as scenario #7 in Table B-2. The parameters for SpaceCast™ and System-Y are given in Tables B-5 and B-6. The C/I results show that SpaceCast™ and a typical Ku-band system can operate spaced 2° apart without causing or receiving harmful interference.

Finally, C/I analyses were performed to determine whether SpaceCast™ could share spectrum with the Ku-band portion of Expressway™. In the