

ShawPittman LLP

A Limited Liability Partnership Including Professional Corporations

January 11, 2002

Via Electronic Filing

Ms. Magalie Roman Salas
Secretary
Federal Communications Commission
445 12th Street, S.W.
Washington, D.C. 20554

**Re: Mobile Satellite Ventures Subsidiary LLC
Ex Parte Presentation
IB Docket No. 01-185**

Dear Ms. Salas:

On January 10, 2002, Carson Agnew, Managing Director; Peter Karabinis, Chief Technical Officer; Lon Levin, Vice President and Regulatory Counsel; Gary Churan, Director, Mobile Terminal Engineering; Dick Evans, Senior Scientist; and Serge Nguyen, Director, Engineering; all of Mobile Satellite Ventures Subsidiary LLC ("MSV"), along with Tom Sullivan of Sullivan Telecommunications Associates, and Bruce Jacobs and David Konczal of Shaw Pittman LLP, counsel to MSV, met with Jim Ball, Paul Locke, Brian Major, Ron Repasi, Tom Tycz, and Marcus Wolf of the International Bureau. MSV presented the information contained in the attached set of presentation materials. MSV has submitted page 10 of these presentation materials under separate cover with a request for confidential treatment. This page contains information relating to the ongoing international L-band frequency coordination process which is confidential among the parties to that coordination.

Please direct any questions regarding this matter to the undersigned.

Very truly yours,



David S. Konczal

cc: Jim Ball
Paul Locke
Brian Major
Ron Repasi
Tom Tycz
Marcus Wolf

**MSV's Next Generation
Satellite System
Coordination and Interference
Considerations**

Presented to the
Federal Communications Commission
January 10, 2002

Issues to be discussed

- Potential interference to satellite uplinks (from MSV mobile terminals)
 - intra-system (from MSV MTs operating in ATC mode)
 - inter-system (from MSV MTs operating in either satellite or ATC modes)
 - > adjacent channel operations
 - > co-channel operations

- Potential interference to users of other systems (Inmarsat, aero telemetry) in the downlink direction (from MSV's ATC base stations)
 - desensitization/overload
 - out-of-band emissions

Key Conclusions

- Coordination of the MSS L-band will continue to be driven by satellite operations
- MSV's next generation system will improve prospects for coordination
- ATC base stations will not cause harmful interference to other systems

1. Coordination of the MSS L-band will continue to be driven by satellite operations

- **Under the most recent Operators Agreement, less than ten percent of the MSS L-band spectrum is shared co-channel**

- **Co-channel sharing between MSV's next generation satellite system and Inmarsat's satellites is likely to continue to be largely impractical -- regardless of MSV's deployment of ATC**
 - The 20 dB satellite antenna discrimination value stated by Inmarsat (for the Inmarsat 4 satellites) makes sharing unlikely
 - Co-channel sharing between satellite operations is more likely only if Inmarsat is willing to improve its antenna discrimination to about 25 dB or better

- **ATC operations will not require MSV to coordinate access to more spectrum**
 - MSV's satellite system is designed with 10 dB link margin
 - Only 0.25 dB of link margin will be expended by MSV's satellite to accommodate the effect of the ATC operations

2. MSV's next generation system will improve prospects for coordination (uplink issues)


- **Adjacent channel interference to Inmarsat satellites will be reduced by more than two orders of magnitude relative to the level produced by MSV's current satellite system**
- **Co-channel interference will be reduced by more than one order of magnitude**
- **Fully-loaded, mature ATC operations will not impact the ability of MSV and Inmarsat systems to coordinate co-channel operations**
 - less than 1/30th of the effect of the satellite operations
 - no more than one percent contribution to $\Delta T/T$

3. ATC base stations will not cause harmful interference to other systems (downlink issues)


- **ATC base stations will not interfere with land mobile satellite terminals**
 - More than 20dB of desensitization/overload margin is provided throughout the entire service area of a base station
 - Adjacent channel interference due to out-of-band emissions is kept at less than 1% Δ T/T throughout the entire service area of a base station
- **ATC base stations will not interfere with aeronautical mobile satellite terminals**
 - Worst-case analysis assumes the aircraft is directly over an urban area covered by 1000 base stations within line of sight
 - More than 10 dB of desensitization/overload margin is provided even at the minimum allowed aircraft altitude of 304 meters
 - With respect to adjacent channel interference due to out-of-band emissions, the aggregate Δ T/T is kept below 5% at an altitude of 304 meters
- **ATC base stations can be coordinated with aeronautical telemetry**
 - The interference zone in which the allowed interference level of $-181\text{dBW}/\text{m}^2/4\text{KHz}$ might be exceeded (assuming worst-case, line-of-sight conditions) is 0.9 km

Current System and Proposed (Next Generation) System

MSV's Current System Architecture

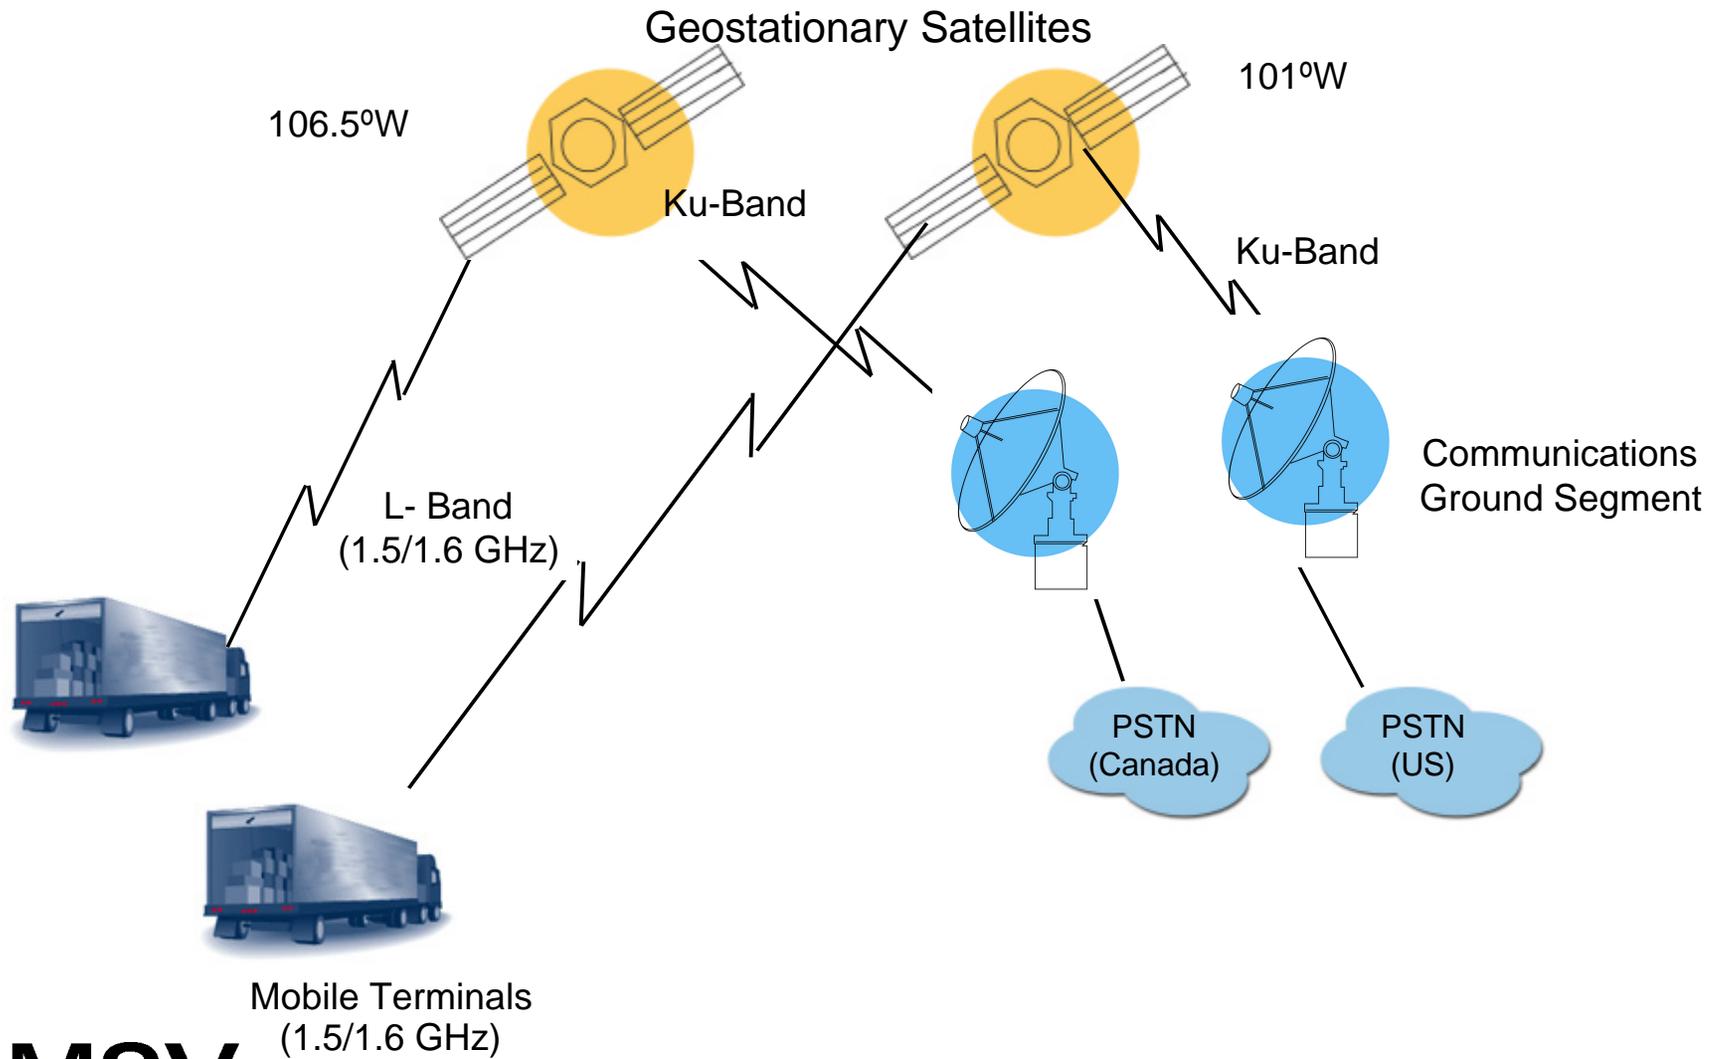

MSV's Current System Coverage

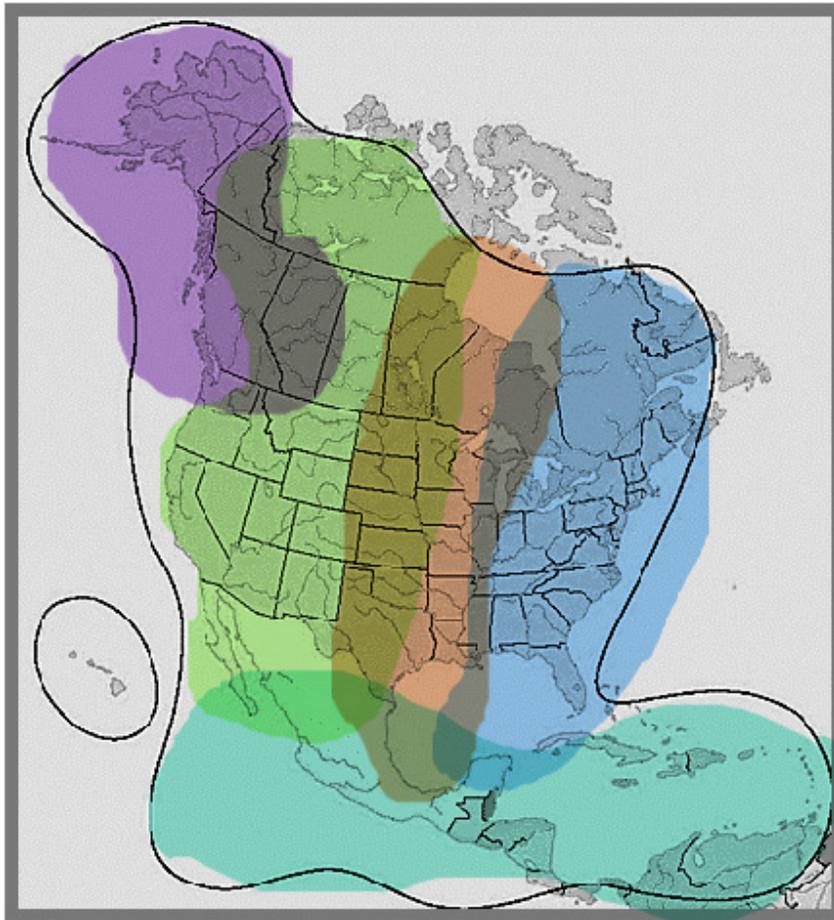

- Continental U.S.
- Canada
- Gulf of Mexico
- Caribbean
- Alaska and Hawaii
- Up to 200 miles off-shore
- Central America
- Northernmost South America

Current Spectrum Sharing between MSV & Inmarsat

Redacted

Current MSV Customers

Public Service Customers

- American Red Cross
- USDA
- Department of Transportation
- Drug Enforcement Agency
- FAA
- FEMA
- Federal Highway Administration
- HHS
- Hawaii DOD
- NYC Fire Department
- Missouri Highway Patrol
- U.S. Fish and Wildlife

Commercial Customers

- Amoco Corp.
- AT&T Wireless
- Boeing
- CBS
- Colonial Pipeline
- El Paso Energy
- Florida Power and Light
- Northern Natural Gas
- Rio Grande Electric
- Southwest Power Pool
- Vistar
- Williams Companies


Proven Emergency Response




Jeff personally delivered 50 portable MTs to the NYPD, NY/NJ Port Authority Police, NYC Fire Department and others.

Jeff Corcoran, of MSV, stands with NYPD Detective Goldstein at Ground Zero.


MSV's Next Generation Satellite Network Elements

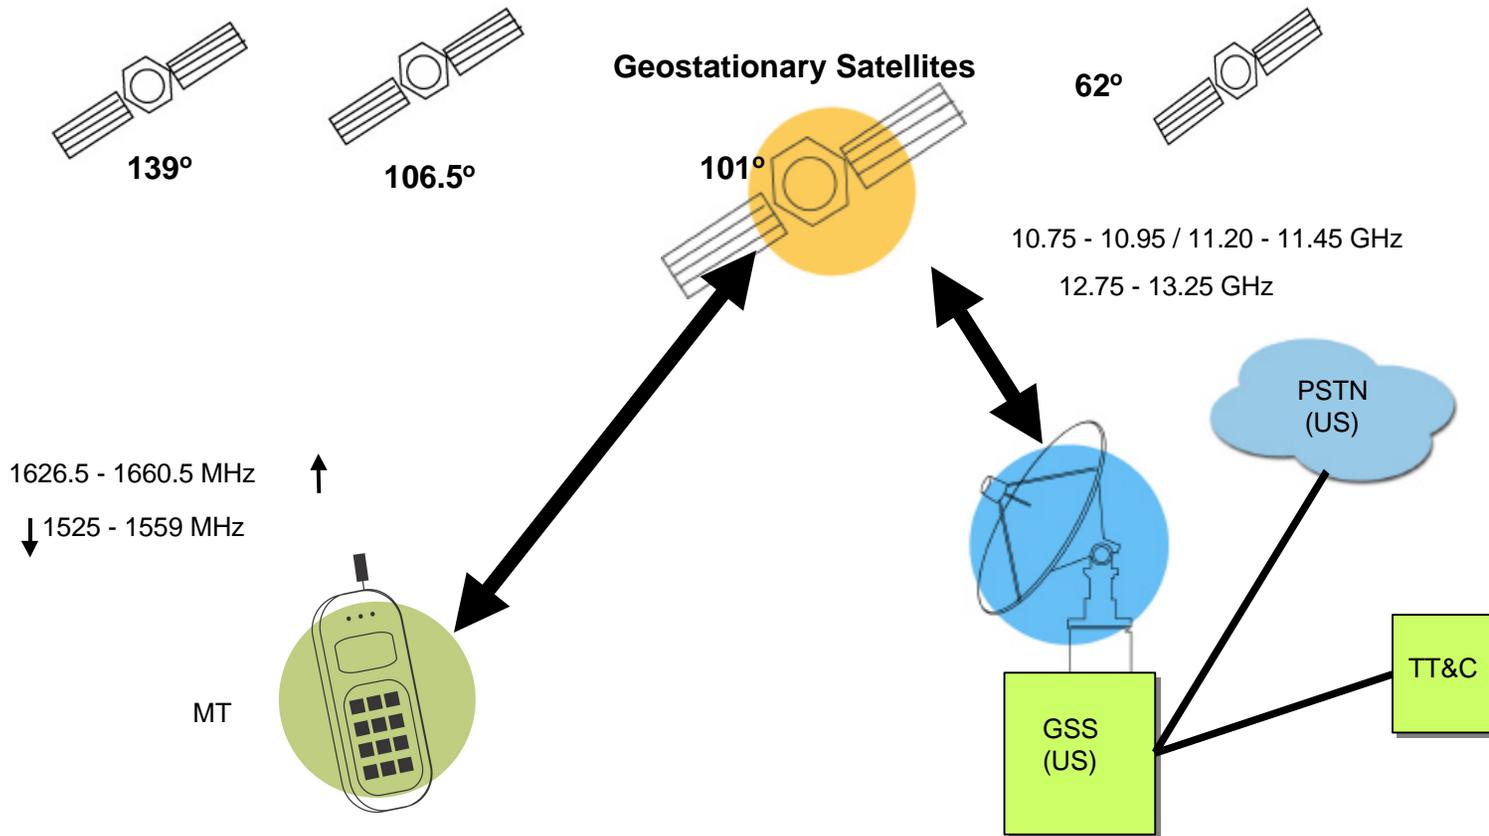


MSV's Next Generation Satellite Spot Beam Pattern (over 200 Spot Beams)

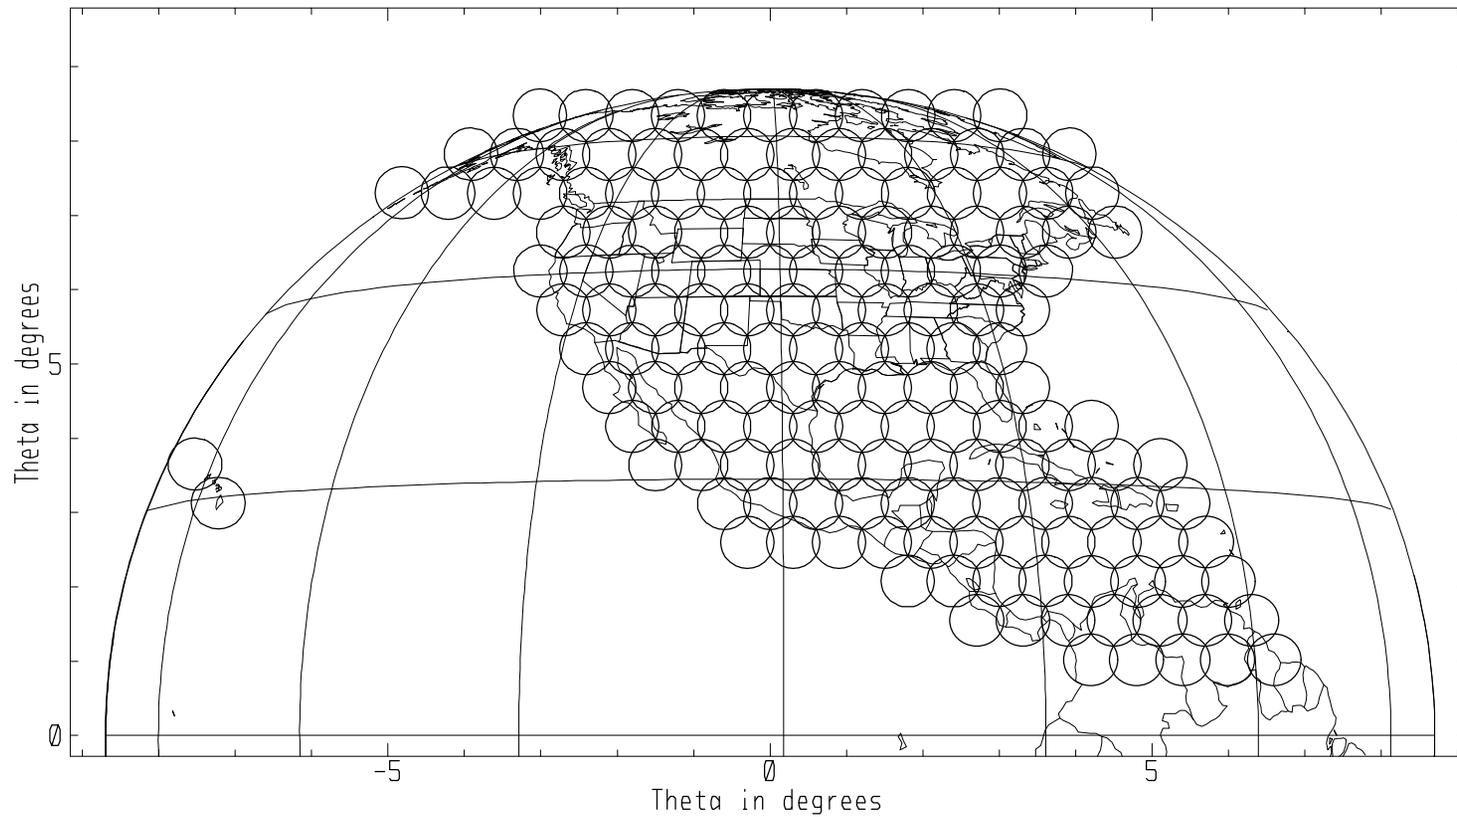

Ancillary Terrestrial Component (ATC) Elements (Standard GSM Architecture)

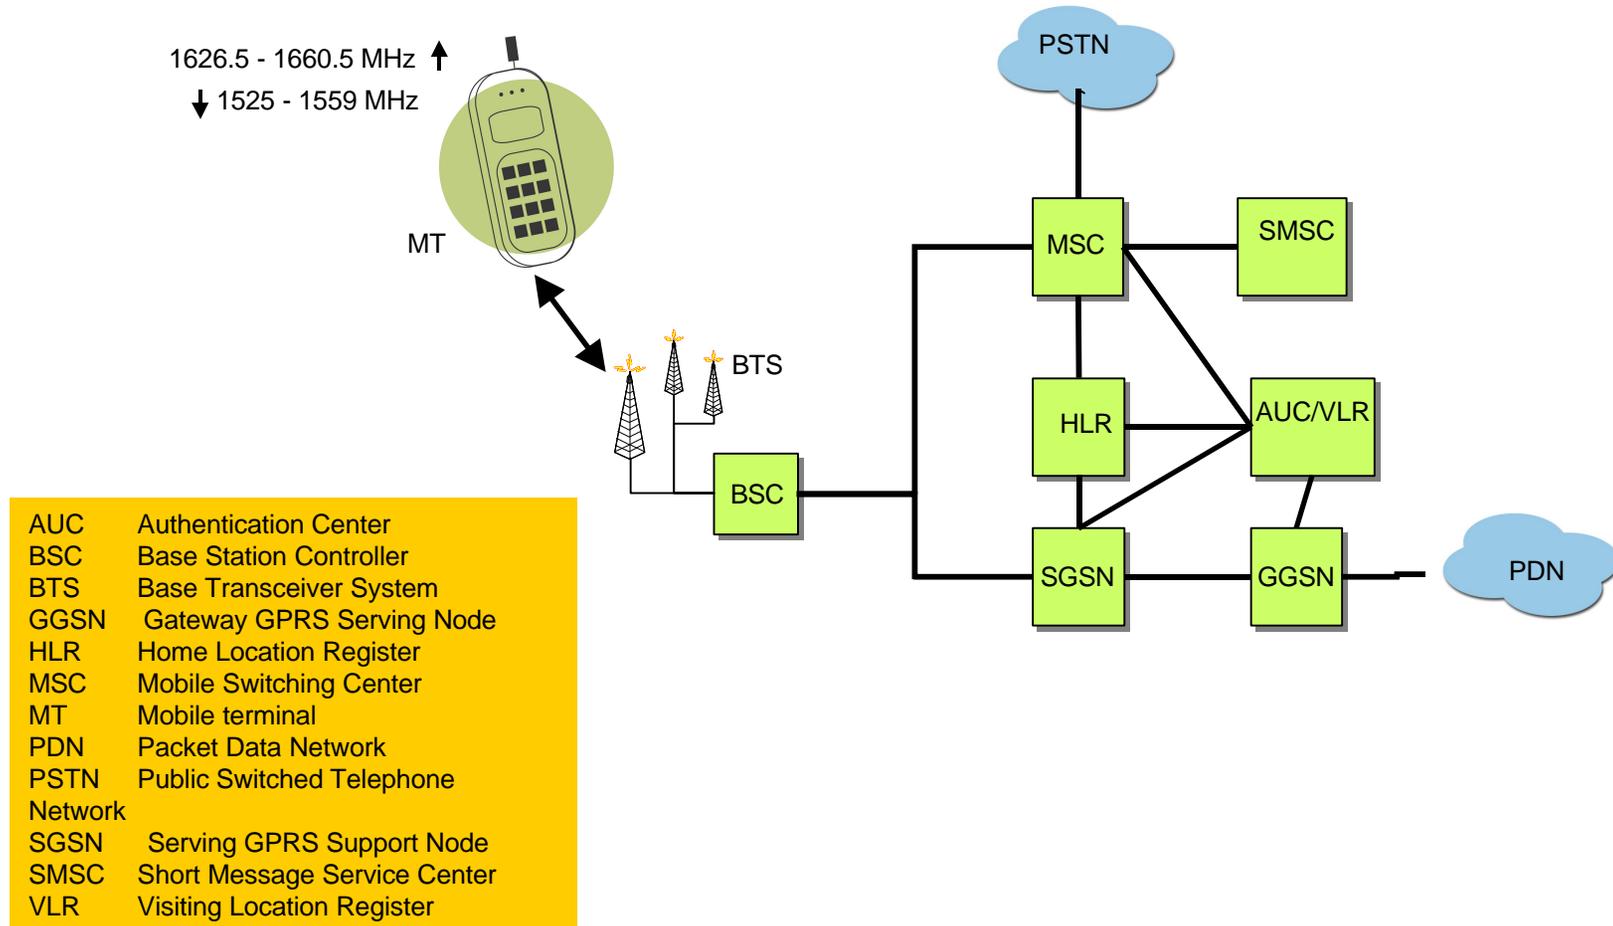

MSV's Integrated Satellite-Ancillary Network (Standard GSM Architecture)

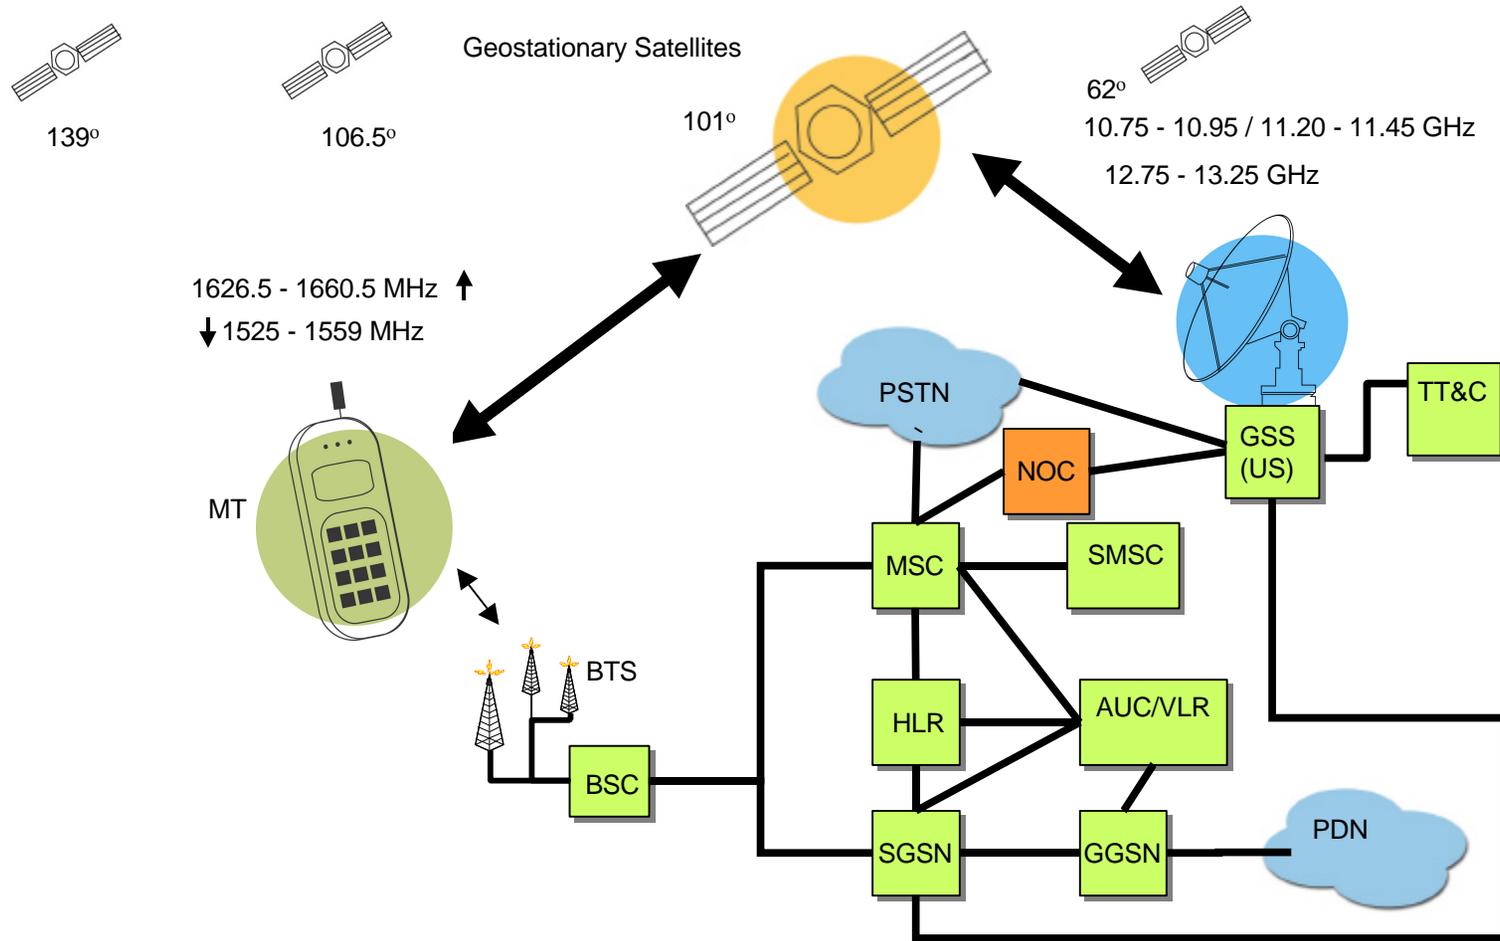


Relevant MSV System Parameters


(For Current & Next Generation System)

CURRENT GENERATION		NEXT GENERATION	
SATELLITE CHARACTERISTICS			
PARAMETER			
Satellite Longitudes	101 W and 106.5 W	101 W and 106.5W	
Satellite Transmit Band	1530 –1559 MHz	1525 –1559 MHz	
Mobile Terminal Transit Band	1631.5 – 1660.5 MHz	1626.5 – 1660.5 MHz	
Polarization	RHCP	RHCP	
Peak Antenna Gain	29 dBi	42.5 dBi	
System Temperature	600 K	450 K	
Peak G/T	3.7 dB/K	16 dB/K	
Total EIRP @ Peak Max/beam	56.6 dBW	80 dBW	
Carrier Bandwidth	6 kHz	200 kHz Satellite Transmit 50 KHz Satellite Receive	
MOBILE TERMINAL CHARACTERISTICS			
		Satellite	Terrestrial
Access Mode	SCPC	TDMA	TDMA
Mobile Terminal Maximum EIRP	12.5 – 16.0 dBW	5 dBW	0 dBW
Polarization	RHCP	RHCP	Linear
Carrier Bandwidth-Transmit	6 KHz	50 KHz	200 KHz
Carrier Bandwidth-Receive	6 KHz	200 KHz	200 KHz
Channels per carrier (Rx/Tx)	1	32/8	8/8
BASE STATION CHARACTERISTICS			
			Terrestrial
Access Mode			TDMA
BTS Maximum EIRP			19.1 dBW
Polarization			LHCP
Carrier Bandwidth-Transmit			200 kHz
Carrier Bandwidth-Receive			200 kHz
Channels per carrier			8

MSV's Satellite/Terrestrial Reuse Plan (illustrative)

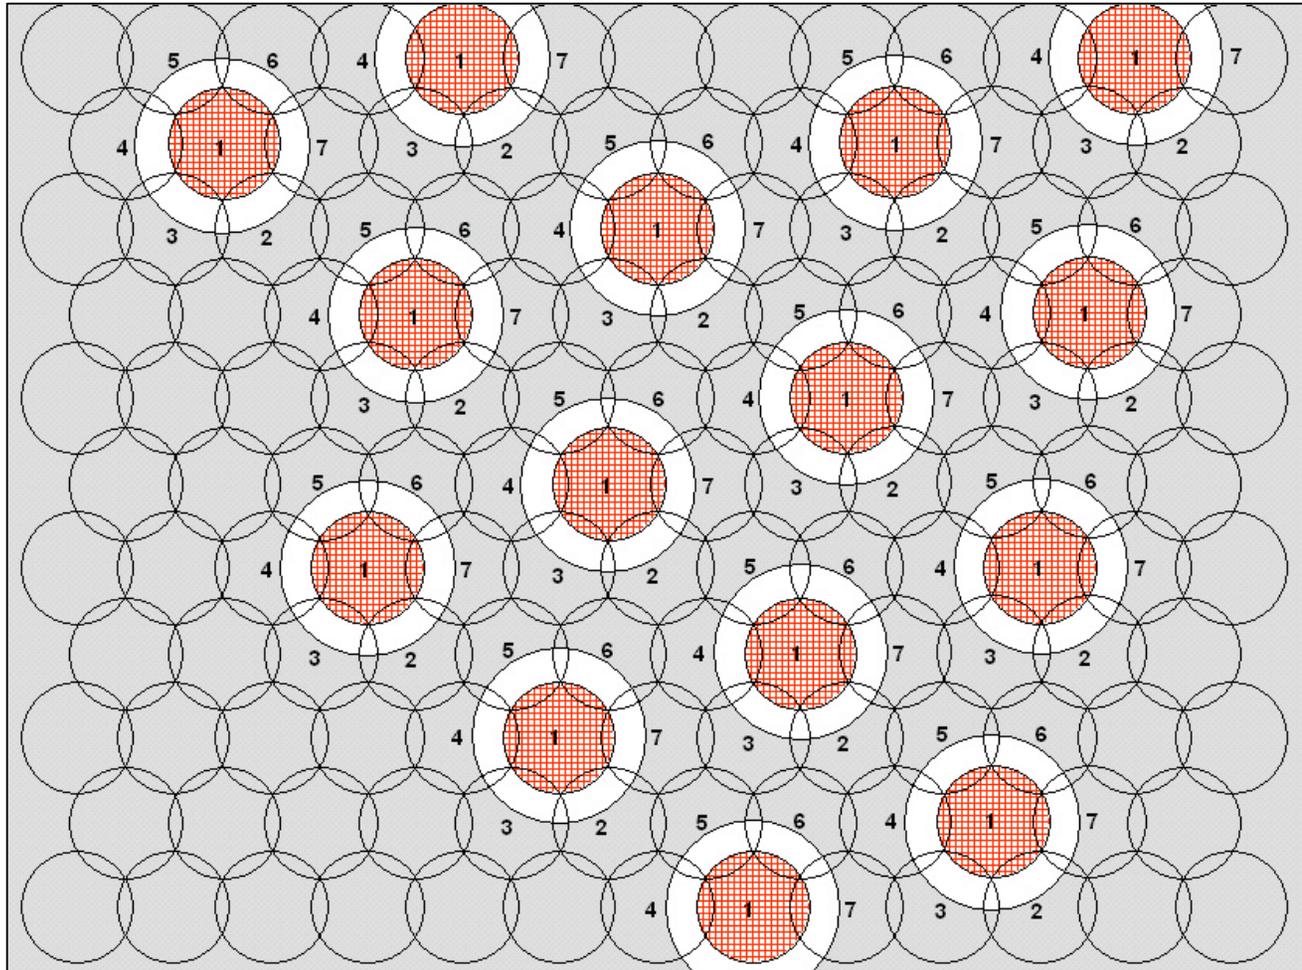

Frequency Agility (illustrative)

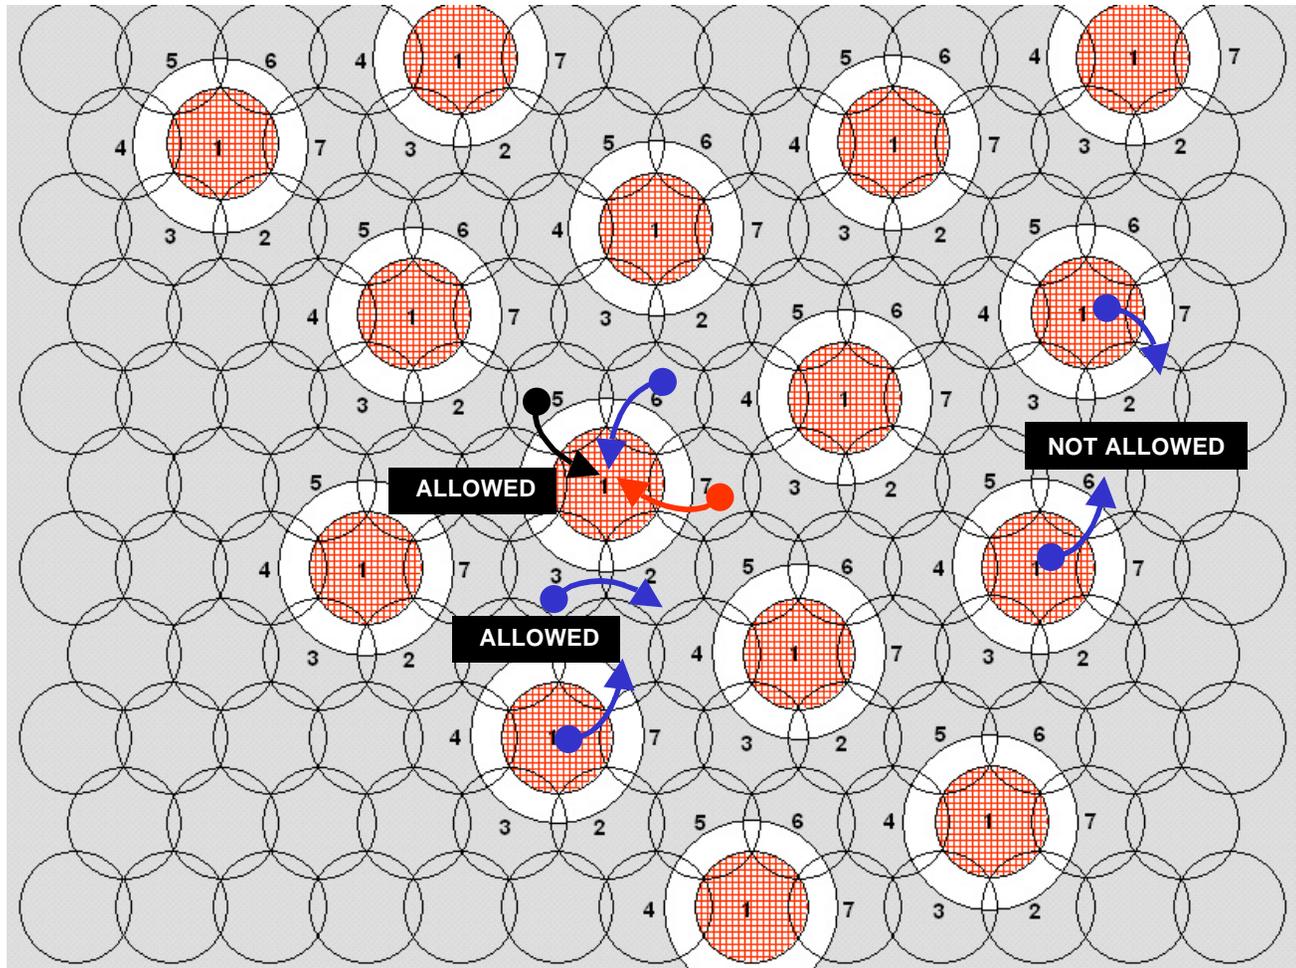

Coordination and Interference Issues

Potential Intra-System Interference from MSV's Terminals to MSV's Satellite (from ATC operations)

Parameter	Units	Values
Link Margin Degradation	dB	0.25
MSV Satellite Antenna Gain (average per beam)	dBi	41
MSV Satellite Receiver Noise Temperature	K	450
MSV Satellite Receiver Noise Spectral Density	dBW/Hz	-202.1
Maximum MSV Ancillary Terminal EIRP	dBW	0
MSV Terminal Carrier Bandwidth (ancillary mode)	kHz	200
MSV Terminal EIRP Spectral Density	dBW/Hz	-53.0
Free Space Loss	dB	188.8
Average Shielding	dB	10
MSV Satellite Receive Antenna Discrimination (Average)	dB	10
Average Power Reduction due to Closed-Loop Power Control	dB	6
Average Power Reduction due to Variable-Rate Vocoder	dB	7.4
Average Polarization Isolation (Linear to Circular)	dB	3
Voice Activity Factor	dB	1
Received Interfering Signal Spectral Density	dBW/Hz	-238.2
Max Number of Co-channel ATC Carriers per Co-channel Spot Beam Vicinity		244
Number of Users per Carrier		7
Maximum Number of ATC Users per Co-channel Spot Beam Vicinity		1,707
Number of Co-Channel Satellite Beam Vicinities over CONUS		~10
Total Number of Allowed Ancillary Co-Channel Carriers Over CONUS		2,438

Potential Adjacent Channel Interference from MSV's Terminals to Inmarsat's North American Satellites (from satellite and ATC operations)

Parameter	Units	Inmarsat-3			Inmarsat-4		
		Current Terminals	Next-Gen. Terminals (satellite operations)	ATC Terminals	Current Terminals	Next-Gen. Terminals (satellite operations)	ATC Terminals
Inmarsat Satellite G/T	dB/K	-1.45	-1.45	-1.45	13	13	13
Inmarsat Satellite Antenna Gain	dBi	27	27	27	41	41	41
Inmarsat Satellite Receiver Noise Temperature	K	700	700	700	650	650	650
Inmarsat Satellite Receiver Noise Spectral Density	dBW/Hz	-200.1	-200.1	-200.1	-200.5	-200.5	-200.5
Maximum MSV Terminal EIRP	dBW	16	5	0	16	5	0
MSV Terminal Max. Out-of-Band Emissions Density	dBW/Hz	-79.5	-103	-103	-79.5	-103	-103
Free Space Loss	dB	188.8	188.8	188.8	188.8	188.8	188.8
Average Shielding	dB	0	0	10	0	0	10
Average Power Reduction due to Closed-Loop Power Control	dB	0	2	6	0	2	6
Average Power Reduction due to Variable-Rate Vocoder	dB	0	0	7.4	0	0	7.4
Voice activity	dB	0	3	1	0	3	1
Average Polarization Isolation (Linear to Circular)	dB	0	0	3	0	0	3
Total Received Interfering Signal Spectral Density	dBW/Hz	-241.3	-269.8	-292.2	-227.3	-255.8	-278.2
Δ T/T Increase Per MSV carrier	%	0.0076	0.00001	0.0000001	0.2089	0.0003	0.000002
Maximum Number of MSV Carriers		1,800	1,800	90,000	1,800	1,800	90,000
Total DT/T Increase Based on Total Number of Carriers	%	3.414	0.005	0.001	3.76	0.0055	0.003

Potential Co-Channel Interference from MSV's Terminals to Inmarsat 3 satellites (from satellite operations only)

Parameter	Units	MSV Current Terminals	MSV Next Gen Terminals (Satellite Operations)
Inmarsat 3 Satellite G/T	dB/K	-1.45	-1.45
Inmarsat 3 Satellite Antenna Gain	dBi	27	27
Inmarsat 3 Satellite Receiver Noise Temperature	K	700	700
Inmarsat 3 Satellite Receiver Noise Spectral Density	dBW/Hz	-200.1	-200.1
Maximum MSV Satellite Terminal EIRP	dBW	16	5
MSV Terminal Carrier Bandwidth	kHz	6	50
MSV Terminal EIRP Spectral Density	dBW/Hz	-21.8	-42.0
Free Space Loss	dB	188.8	188.8
Average Shielding	dB	0	0
Inmarsat Satellite Receive Antenna Discrimination	dB	22	22
Average Power Reduction due to Closed-Loop Power Control	dB	0	2
Average Polarization Isolation (Linear to Circular)	dB	0	0
Voice Activity Factor	dB	0	3
Received Interfering Signal Spectral Density	dBW/Hz	-205.6	-230.8
Δ T/T Increase Per MSV carrier	%	28.6	0.086
System Maximum Frequency Reuse Factor		2	28
Total Δ T/T Increase at Maximum Reuse	%	57.24	2.42

Potential Co-Channel Interference from MSV's Terminals to Inmarsat 4 Satellites (from satellite operations only)

Parameter	Units	MSV Current Terminals			MSV Next Generation Terminals (Satellite Operations)		
Inmarsat 4 Satellite G/T	dB/K	13	13	13	13	13	13
Inmarsat 4 Satellite Antenna Gain	dBi	41	41	41	41	41	41
Inmarsat 4 Satellite Receiver Noise Temperature	K	650.0	650.0	650.0	650	650	650
Inmarsat 4 Satellite Receiver Noise Spectral Density	dBW/Hz	-200.5	-200.5	-200.5	-200.5	-200.5	-200.5
Maximum MSV Satellite Terminal EIRP	dBW	16	16	16	5	5	5
MSV Terminal Carrier Bandwidth	kHz	6	6	6	50	50	50
MSV Terminal EIRP Spectral Density	dBW/Hz	-21.8	-21.8	-21.8	-42.0	-42.0	-42.0
Free Space Loss	dB	188.8	188.8	188.8	188.8	188.8	188.8
Average Shielding	dB	0	0	0	0	0	0
Inmarsat Satellite Receive Antenna Discrimination	dB	20	25	30	20	25	30
Average Power Reduction due to Closed-Loop Power Control	dB	0	0	0	2	2	2
Average Polarization Isolation (Linear to Circular)	dB	0	0	0	0	0	0
Voice Activity Factor	dB	0	0	0	3	3	3
Received Interfering Signal Spectral Density	dBW/Hz	-189.6	-194.6	-199.6	-214.8	-219.8	-224.8
Δ T/T Increase per MSV carrier	%	1227	388	123	3.7	1.2	0.4
System Maximum Frequency Reuse Factor		2	2	2	28	28	28
Total Δ T/T Increase at Maximum Reuse	%	2454	776	245	103.6	32.7	10.4

Potential Co-Channel Interference from MSV's Terminals to Inmarsat 3 & 4 Satellites (from ATC operations)

Parameter	Units	Inmarsat 3 Satellite	Inmarsat 4 Satellite		
Inmarsat Satellite G/T	dB/K	-1.45	13	13	13
Inmarsat Satellite Antenna Gain	dBi	27	41	41	41
Inmarsat Satellite Receiver Noise Temperature	K	700	650.0	650.0	650.0
Inmarsat Satellite Receiver Noise Spectral Density	dBW/Hz	-200.1	-200.5	-200.5	-200.5
Maximum MSV Terminal EIRP	dBW	0.0	0.0	0.0	0.0
MSV Terminal Carrier Bandwidth	kHz	200	200	200	200
MSV Terminal EIRP Spectral Density	dBW/Hz	-53.0	-53.0	-53.0	-53.0
Free Space Loss	dB	188.8	188.8	188.8	188.8
Average Shielding	dB	10	10	10	10
Inmarsat Satellite Receive Antenna Discrimination	dB	22	20	25	30
Average Power Reduction due to Closed-Loop Power Control	dB	6	6	6	6
Average Power Reduction due to Variable-Rate Vocoder	dB	7.4	7.4	7.4	7.4
Average Polarization Isolation (Linear to Circular)	dB	3	3	3	3
Voice Activity Factor	dB	1	1	1	1
Received Interfering Signal Spectral Density	dBW/Hz	-264.2	-248.2	-253.2	-258.2
Δ T/T Increase per MSV carrier	%	0.00004	0.0017	0.0005	0.0002
Maximum CONUS-wide Frequency Reuse		2,000	2,000	2,000	2,000
Total Δ T/T Increase based on maximum reuse across CONUS	%	0.08	3.37	1.06	0.34

Potential Out-of-Band Interference from MSV's ATC Base Stations to Inmarsat Terminals

Parameter	Units	Inmarsat Value	MSV Value
MSV Base Station Power to Antenna per 200 kHz Carrier	dBW	3.1	3.1
MSV Base Station Antenna Gain – Peak	dBi	16.0	16.0
Out-of-band Attenuation	dB	46.1	--
MSV Base Station OBE to Antenna	dBW/MHz	--	-57.9
MSV Base Station EIRP per 200 kHz Carrier (in MSV Channel)	dBW	19.1	19.1
MSV Base Station Antenna Discrimination Toward MES	dB	--	-12.5
MSV Base Station EIRP per 200 kHz Carrier (in Inmarsat Channel)	dBW	-27.0	-61.4
Distance of Inmarsat Terminal from MSV Base Station Transmitter	m	100	100
Free Space Loss (Line-of-Sight) :	dB	76.0	
Walfisch-Ikegami non-line-of-sight:			95.5
Shielding	dB	0	0
Power Control Reduction	dB	6	6
Voice Activity Reduction	dB	4	4
Polarization Isolation (LHCP to RHCP)	dB	3.0	8.0
Gain of Inmarsat MES towards MSV Base Station	dBi	0.0	0.0
Sum of Attenuation Factors and MES Antenna Gain	dB	89.0	113.5
Received Interfering Signal Power in 200 kHz	dBW	-116.0	-174.9
Received Interfering Signal Power Spectral Density	dBW/Hz	-169.0	-227.9
Inmarsat MES Receiver Noise Temperature	K	150	290
Inmarsat MES Receiver Noise Spectral Density	dBW/Hz	-206.8	-204.0
Δ T/T increase per MSV 200 kHz Carrier	%	611,842.9	0.41

Potential Overload by MSV's ATC Base Stations of Inmarsat Terminals

Parameter	Units	Inmarsat Value	MSV Value
MSV Base Station EIRP per 200 kHz carrier	dBW	19.1	19.1
Total Bandwidth of Base Station Transmissions Per Sector	MHz	5	0.6
Max. Number of Base Station Carriers Per Sector		25	3
Distance of Inmarsat Terminal from Base Station	m	100	100
Propagation Path Loss†	dB	76	95.5
Average Power Reduction due to Closed-Loop Power Control	dB	6	6
Voice Activity Reduction	dB	4	4
Polarization Isolation	dB	3	8
Gain of Inmarsat Terminal toward Base Station	dB _i	0	0
Base station antenna discrimination toward Inmarsat MT	dB	--	-12.5
Received Interfering Signal Power	dBW	-55.9	-101.9
Threshold for Overload of Inmarsat Mini-M*	dBW	-120	-75
Desensitization Margin	dB	-64.1	26.9

•26.9 dB overload margin at 100m separation from tower

† Inmarsat assumes line-of-sight propagation; MSV assumes Walfisch-Ikegami non-line-of-sight propagation as more realistic at a distance of 100 meters from the base station.

* The MSV Value is based on measurements performed by MSV and is consistent with the AIRNC specification.

Potential Interference from MSV's ATC Base Stations to Airborne Satellite Terminals

Parameters	Units	
BTS Spurious EIRP Density/Carrier	dBW/Hz	-101.9
Carriers per Sector	--	3
Voice Activity Reduction	dB	4
Average Power Reduction due to Closed-Loop Power Control	dB	6
Polarization Discrimination	dB	8
Total Effective Spurious EIRP Density per BTS	dBW/Hz	-115.1
Calculated Receiver Spurious Power Density at Aircraft Receiver (1000 BTS)	dBW/Hz	-216.7
Aircraft Receiver Noise Temperature	dBK	25.0
Aircraft Receiver Thermal Noise Density	dBW/Hz	-203.6
Allowable Δ T/T	--	6%
Max Allowable Spurious Power Density at Aircraft Receiver	dBW/Hz	-215.8
Aggregate Receiver Δ T/T (from 1000 BTS)		4.9%
BTS EIRP per Carrier	dBW	19.1
Carriers per BTS Sector	--	3
Voice Activity Reduction	dB	4
Average Power Reduction due to Closed-Loop Power Control	dB	6
Polarization Discrimination	dB	8
BTS EIRP Total per Sector	dBW	10.9
Calculated Power at Aircraft Receiver	dBm	-60.7
Max Allowable Power at Aircraft Receiver (per ARINC specification)	dBm	-50.0
Margin to Overload Threshold	dB	10.7

Potential Interference from ATC Base Stations to Aeronautical Telemetry Operations

Parameter	Units	
Frequency	GHz	1.525
Max Allowed Level @ <4 degrees (per Recommendation ITU-R M.1459)	dBW/m ² /4 kHz	-181
Area of Isotropic Ant.	dB-m ²	-25.1
Max Allowed Level into Isotropic Antenna	dBW/4 kHz	-206.1
Ancillary Base Station Frequency	GHz	1.525
Base Station EIRP	dBW	19.1
Voice Activity Factor	dB	-4
Power Control	dB	-6
Carriers per Base Station Sector		3
Effective EIRP	dBW	13.9
Out of band Attenuation	dBc/MHz	-61
Effective Out-of-Band Emissions	dBW/4 kHz	-71.1
Base Station Filter Attenuation	dB@1525 MHz	-40
Base Station Radiated Spurious Power Density	dBW/4 kHz	-111.1
Path Loss Required to Satisfy Allowed Level	dB	95
Walfisch-Ikegami Non-Line of Sight Distance Required to Yield above Path Loss	km	0.1
Line-of-Sight Distance Required to Yield above Path Loss	km	0.9

- **Minimum separation distance of 0.9 km (0.1 km for non line-of-sight) to meet allowable ITU interference level.**
- **The distance is less than the BTS service area**